

H.264 Hexaplex 4CH Network DVR

Support 2G ~ 3.5G Mobile Phone / PDA


MODEL
KW3290
KW3290B

Features :

1. H.264 Baseline 9 recording video quality levels
2. Hexaplex 4CH H.264 DVR: live, recording, playback, backup, network access and control
3. Playback search by Time, Alarm, Motion Detect, & Video Loss
4. Independent camera setting: Video lost, Motion detect, Alarm -> pre-record, buzzer, log, screen message, e-mail inform and recording IPS(Event/Pre-record/Normal)
5. Mixed operation windows - Playback for selected channel in the live monitoring mode.
6. Network capability - remote live view, backup, playback, PTZ control and menu setup
7. Best channel bandwidth management for remote viewing up to 5 users simultaneously
8. Multi-lingual support, Multi-level password to ensure high security
9. I.E. software up to link 4 x H.264 DVRs
10. With Client player, CMS software and AVI conversion Utility



Main Functions

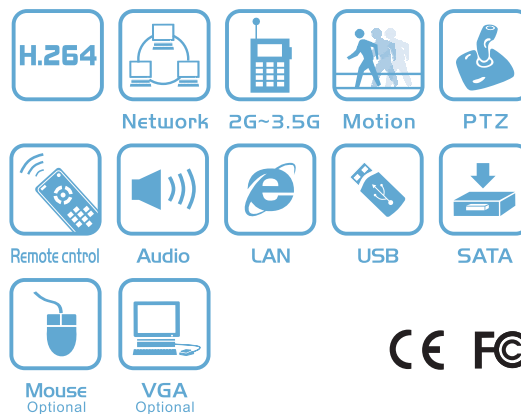

Specifications

Model	KW3290B/KW3290
Video Input/Output Format	NTSC/PAL: BNC 4CH In/1CH Out/SPOT Out
Display Resolution	NTSC 720x480, PAL 720x576, real time per channel
Compression Method	Video: H.264 Audio: ADPCM
Recording Frame rate (IPS) & Resolution	NTSC 30 / 720x480, 60 / 720x240, 120 / 360x240 PAL 25 / 720x576, 50 / 720x288, 100 / 360x288
Recording Time	7~23 days with 500GB HDD for Continuous Recording mode@25fps
Recording Mode	Continuous/Schedule/Alarm/Motion Detect
Hard Disk Capacity	1 x SATA HDD up to 1000GB
Media Backup	1 USB 2.0 ports for Flash Disk, DVD+RW, DVD+R, DVD-R, card readers, HDD, etc.
Sensors, Alarm	4 Inputs, 1 Output(NC, NO relay)
Alarm Type	Motion, Sensor, Video loss, HDD Failed
Audio	1CH In/1CH Out, bi-direction audio capabilities
Network	1 RJ-45 10/100BaseT Ethernet connector(PPPoE, DHCP, DDNS, Static IP)
VGA Output	Optional
PTZ Control	RS-485
I/R Remote Controller	Yes
Mouse port	Optional(OSD operations)
Power Supply	DC12V-3A for AC Adaptor
Operating Temperature	0°C ~ +50°C
Dimension	315(W)x224(D)x52(H)mm

H.264 Hexaplex 9CH/16CH Network DVR

Support 2G ~ 3.5G Mobile Phone / PDA

<p>MODEL KW36299/KW36296 KW36299B/KW36296B</p>	<p>Features :</p> <ol style="list-style-type: none"> 1. H.264 Baseline 9 recording video quality levels 2. Hexaplex 4CH H.264 DVR: live, recording, playback, backup, network access and control 3. Playback search by Time, Alarm, Motion Detect, & Video Loss 4. Independent camera setting: Video lost, Motion detect, Alarm -> pre-record, buzzer, log, screen message, e-mail inform and recording IPS(Event/Pre-record/Normal) 5. Mixed operation windows - Playback selected channel in the live mode. 6. Network capability - remote live view, backup, playback, PTZ control and menu setup 7. Best channel bandwidth management for remote viewing, up to 5 users simultaneously 8. Multi-lingual support, Multi-level password to ensure high security 9. I.E. browser link 4 x H.264 DVRs 10. With Client player, CMS software and AVI conversion Utility
---	---



◀KW36299B
◀KW36296B

◀KW36299
◀KW36296

Main Functions

H.264

Network

2G~3.5G

Motion

PTZ

Mouse

Audio

LAN

USB

SATA

Remote control

VGA



Specifications

Model	KW36299BM/KW36299M	KW36296BM/KW36296M
Video Input/Output Format	NTSC/PAL: BNC 9CH In(Looping)/2CH Out	NTSC/PAL: BNC 16CH In(Looping)/2CH Out
Display Resolution	NTSC 720x480, PAL 720x576, real time per channel	
Compression Method	Video: H.264 Audio: ADPCM	
Recording Frame rate (IPS) & Resolution	NTSC 60 / 720x480, 120 / 720x240, 240 / 360x240 PAL 50 / 720x576, 100 / 720x288, 200 / 360x288	
Recording Time	7~23 days with 500GB HDD for Continuous Recording mode@25fps	
Recording Mode	Continuous/Schedule/Alarm/Motion Detect	
Hard Disk Capacity	Max. 4 x ATA/SATA HDD over 1000GB for each	
Media Backup	2 USB 2.0 ports for USB 2.0 Flash Disk, DVD+RW, DVD+R, DVD-R, card readers, and etc. Internal DVD: DVD+RW, DVD+R, DVD-R	
Sensors, Alarm	9 Inputs, 2 Output(NC, NO relay)	16 Inputs, 2 Output(NC, NO relay)
Alarm Type	Motion, Sensor, Video loss, HDD Failed	
Audio	4CH In/2CH Out, bi-direction audio capabilities	
Network	RJ-45 10/100BaseT Ethernet connector(PPPoE, DHCP, DDNS, Static IP)	
VGA Output	Yes	
PTZ Control	RS-485/RS-232	
I/R Remote Controller	Yes, can control up to 4 DVRs	
Mouse	Yes(OSD operations)	
Power Supply	90~264V AC 47~63Hz, 110W Max	
Operating Temperature	0°C ~ +45°C	
Dimension	430(W)x330(D)x88(H)mm	