

Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S Manual Non-Coded Pull Station



HPS-SAH



HPS-SAK



HPS-DAH



HPS-DAH/S

STANDARD FEATURES

- Metal Construction
- Enclosed switch with glass rod (included)
- 10 Amps @ 120 Vac
- Available in: Single Action, Dual Action and Dual Action in Spanish (HPS-DAH/S)
- UL, FM and CSFM Listed
- Made in USA

DESCRIPTION

Hochiki America Models HPS series pull stations are available in four models:

- HPS-SAH single action
- HPS-SAK single action with key
- HPS-DAH dual action
- HPS-DAH/S dual action (Spanish)

Each model is constructed of a solid die cast housing and come in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 Vdc normally open contact rating. All models are connected via terminal block connections.

PRODUCT LISTING

Underwriter Laboratories: S2984
Factory Mutual: Pending
CSFM: Pending

Continued on back

Specifications subject to change without notice.

Hochiki America Corporation

7051 Village Drive, Suite 100 • Buena Park, CA 90621-2268

Phone: 714/522-2246 • Fax: 714/522-2268


Technical Support: 800/845-6692 or technicalsupport@hochiki.com




Find latest revision at www.hochiki.com

07/2003

Rear View

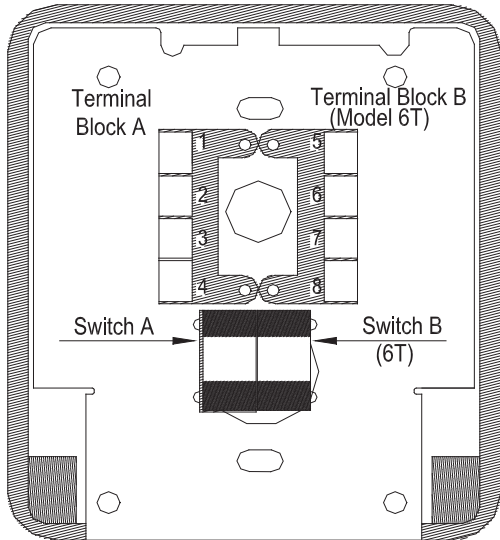

Front View

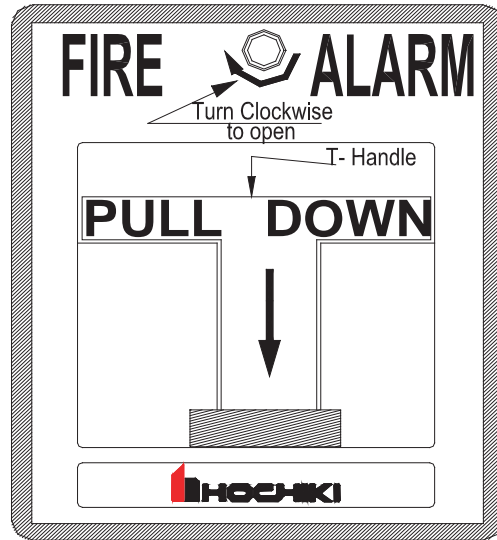

SPECIFICATION

| MODEL | Terminal Block | Terminal Connecting | Switch Function | LED | Terminal Connections Switch | Terminal Connections Phone Jack | Contact Rating |
|----------------------|----------------|---------------------|-----------------|--------------|--------------------------------|------------------------------------|-----------------|
| SAH, SAK, DAH, DAH/S | A | 2 & 3 | SPST | 1(+) & 4 (-) | 1 & 4 | 1 & 4 | 10 amps @125vac |
| EXP./WTR.PRF. | A & B | 1,2,3,5,6,7 | DPDT | 4(+) & 8 (-) | 4 & 8 | 4 & 8 | 10 amps @125vac |

ELECTRICAL WIRING

